



# Tenable.sc and Lieberman RED Integration Guide

---

Last Revised: May 18, 2023



---

## Table of Contents

<b>Welcome to Tenable.sc for Lieberman</b> .....	<b>3</b>
<b>Integrations</b> .....	<b>4</b>
Windows Integration .....	5
SSH Integration .....	8
Configure Database Integration .....	11
Enable Database Plugins .....	13
Add a Credential to a Scan .....	14
<b>Additional Information</b> .....	<b>18</b>
Lieberman System .....	19
About Tenable .....	20



---

# Welcome to Tenable.sc for Lieberman

---

**Caution:** Tenable's integration app for Lieberman is deprecated and is not supported beyond version 7.0. Contact BeyondTrust for the available alternatives or look towards another Tenable-supported PAM solution integration. For a list of supported integrations, see Tenable's [Partner Page](#) and [Integrations documentation page](#).

This document provides information and steps for integrating Tenable.sc with Lieberman.

Security administrators know that conducting network vulnerability assessments means getting access to and navigating an ever-changing sea of usernames, passwords, and privileges. By integrating Tenable.sc with Lieberman, customers have more choice and flexibility.

The benefits of integrating Tenable.sc with Lieberman include:

- Credentials update directly in Tenable.sc, requiring less management.
- Reduced time and effort documenting where credentials are stored in the organizational environment.
- Automatic enforcement of security policies in specific departments or business unit requirements, simplifying compliance.
- Reduced risk of unsecured privileged accounts and credentials across the enterprise.



---

# Integrations

---

The Lieberman system can be configured using either Windows or SSH. Full database support is also provided. Click the corresponding link to view the configuration steps.

[Windows Integration](#)

[SSH Integration](#)

[Database Integration](#)

[Add Credential to the Scan](#)



# Windows Integration

Before you begin:

**Caution:** You must create an **Explicit Account** under **Delegation > Delegation Identities** in Lieberman. For additional information on how to create an Explicit Account, see the Explicit Accounts section in the [Lieberman RED Identity Management Administrator's Guide](#).

To integrate with Windows:


1. Log in to Tenable.sc.
2. In the top navigation bar, click **Scanning**.

A drop-down appears.

3. Click **Credentials**.


The **Credentials** window opens.

4. Click the **+ Add** button.

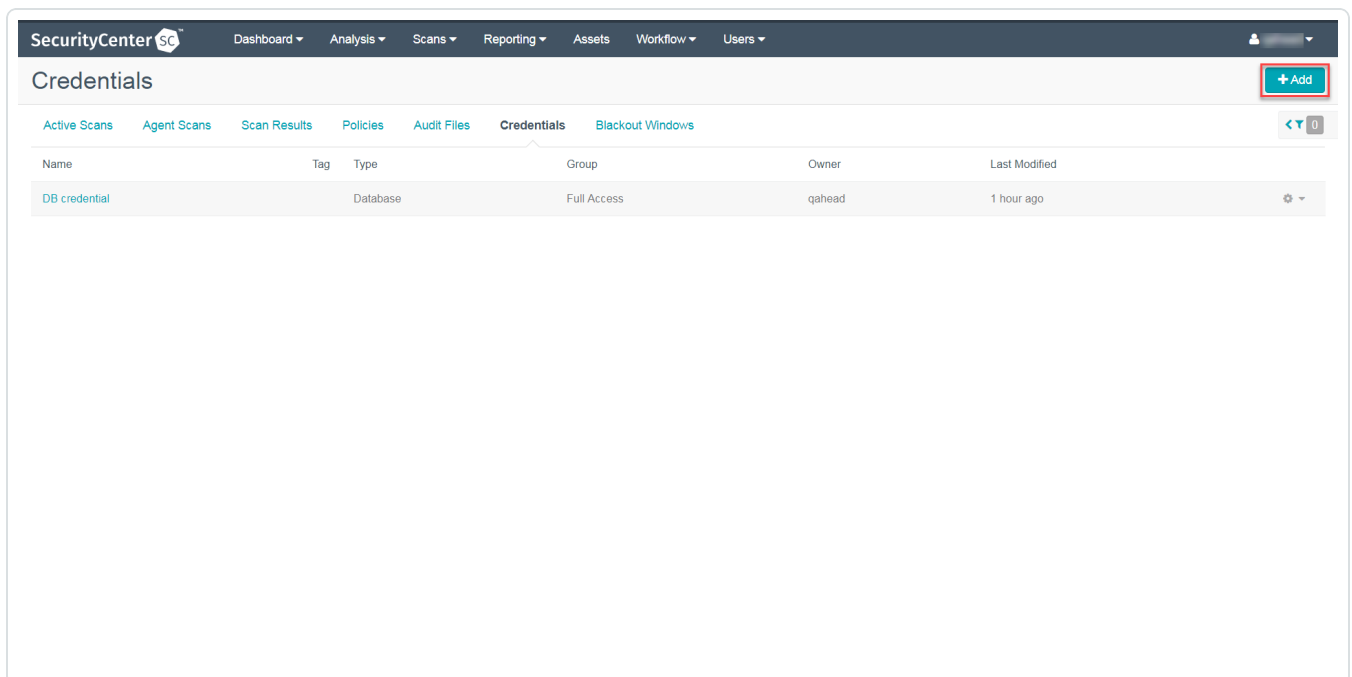


The **Add Credential** window opens.

5. In the **Windows** section, click **Lieberman**.

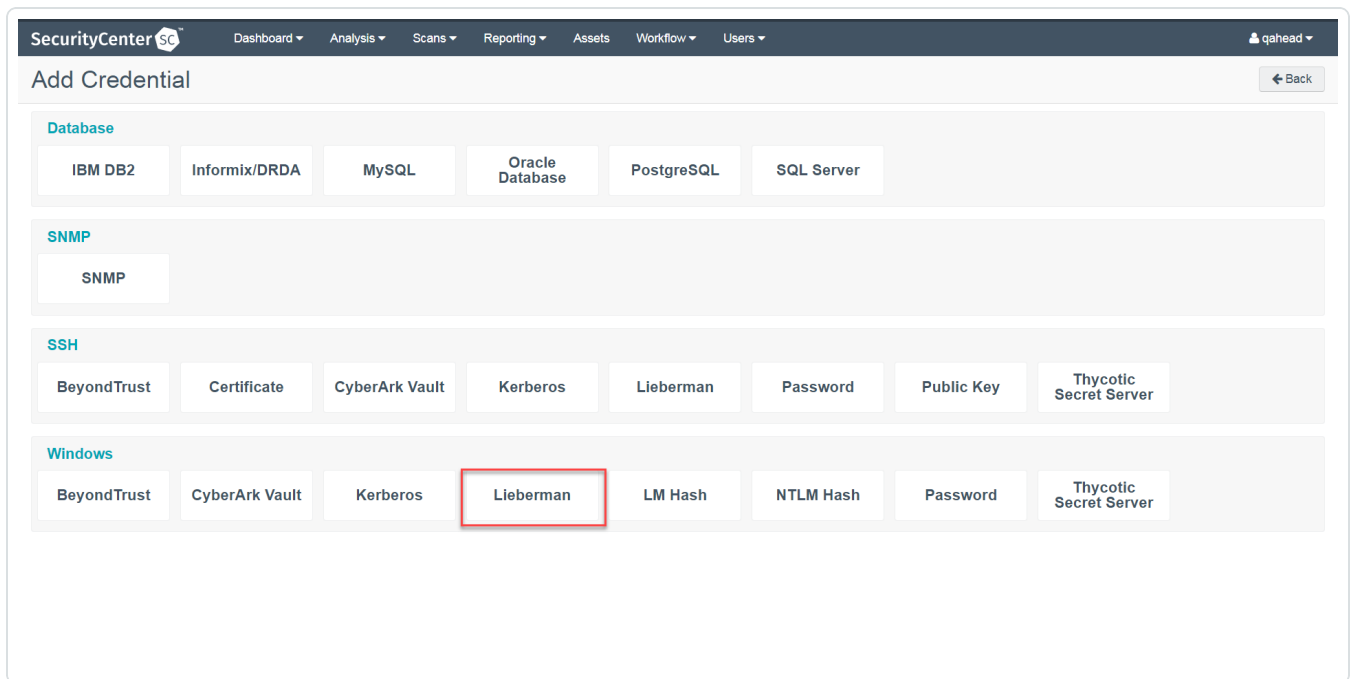

The **Add Credential** configuration page appears.

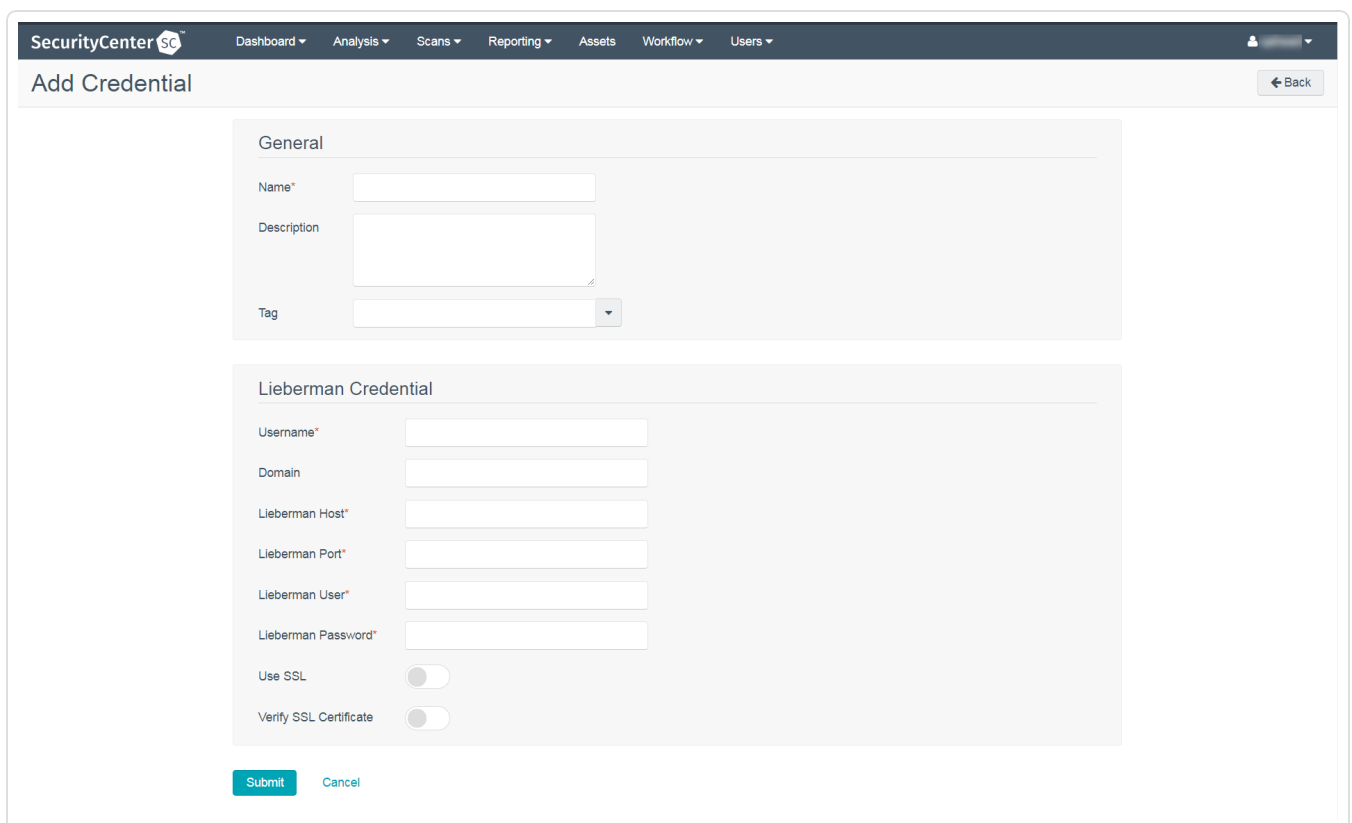



6. In the top section, enter a descriptive **Name** (required) , **Description** (optional), and **Tag** (optional).
7. Configure each field for **Windows** authentication. See [Tenable.sc User Guide](#) to get detailed descriptions for each option.
8. Click **Save**.
9. Next, follow the steps for [adding the credential to a scan](#).



# SSH Integration

Before you begin:

**Caution:** You must create an **Explicit Account** under **Delegation > Delegation Identities** in Lieberman. For additional information on how to create an Explicit Account, see the Explicit Accounts section in the [Lieberman RED Identity Management Administrator's Guide](#).

To integrate with SSH:

To configure a **SSH** credentialed network scan with Lieberman:


1. Log in to Tenable.sc.
2. In the top navigation bar, click **Scanning**.

A drop-down appears.

3. Click **Credentials**.

The **Credentials** window opens.


4. Click the **+ Add** button.

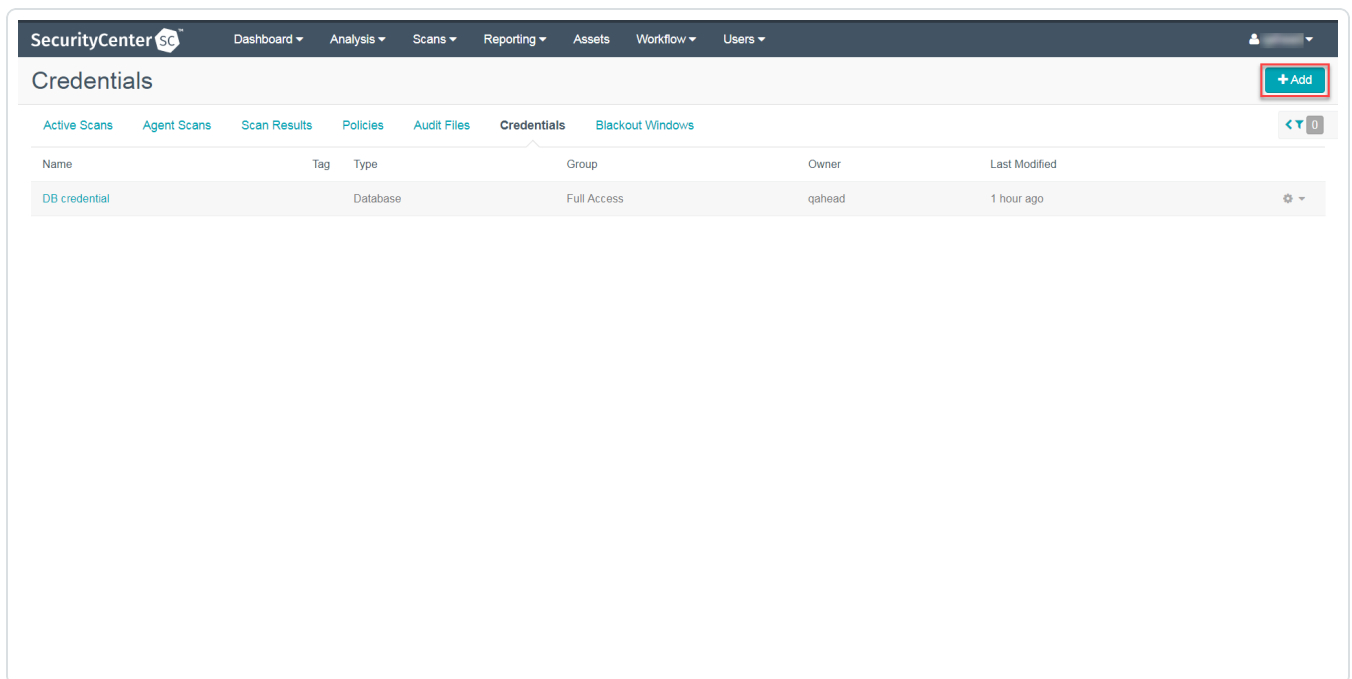


The **Add Credential** window opens.



5. In the SSH section, click **Lieberman**.

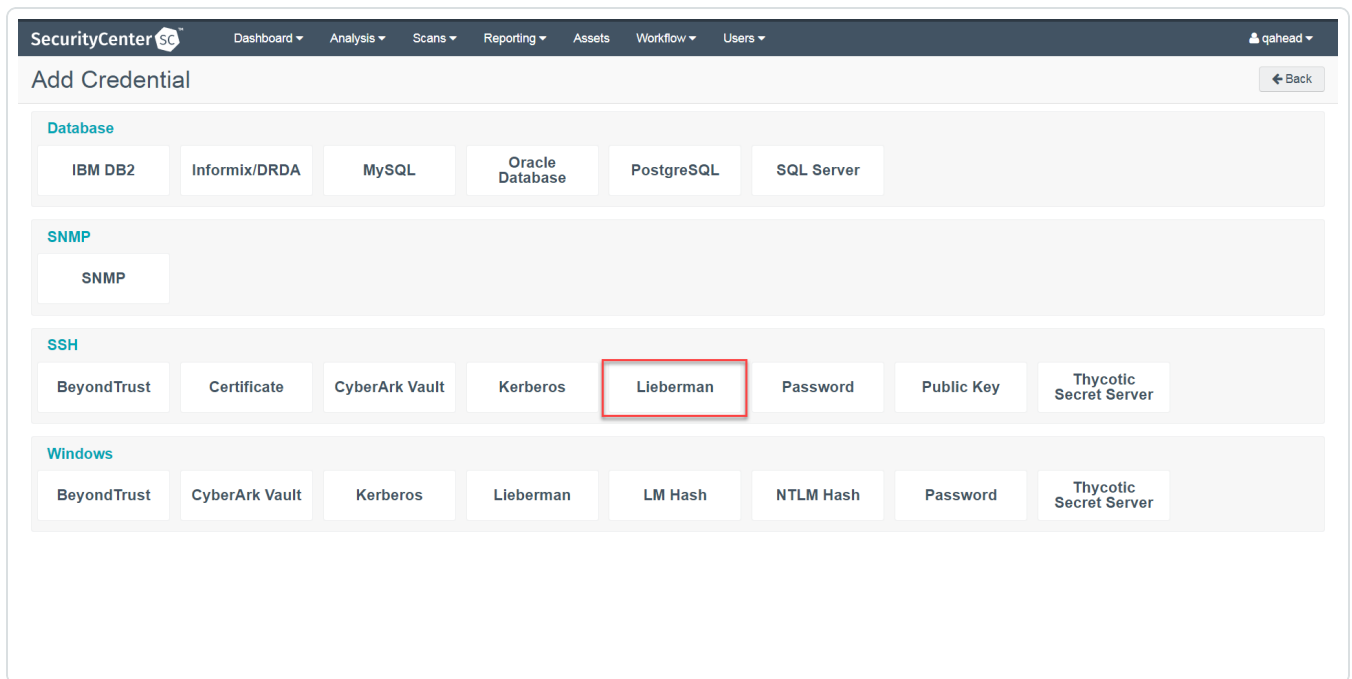

The **Add Credential** configuration page appears.

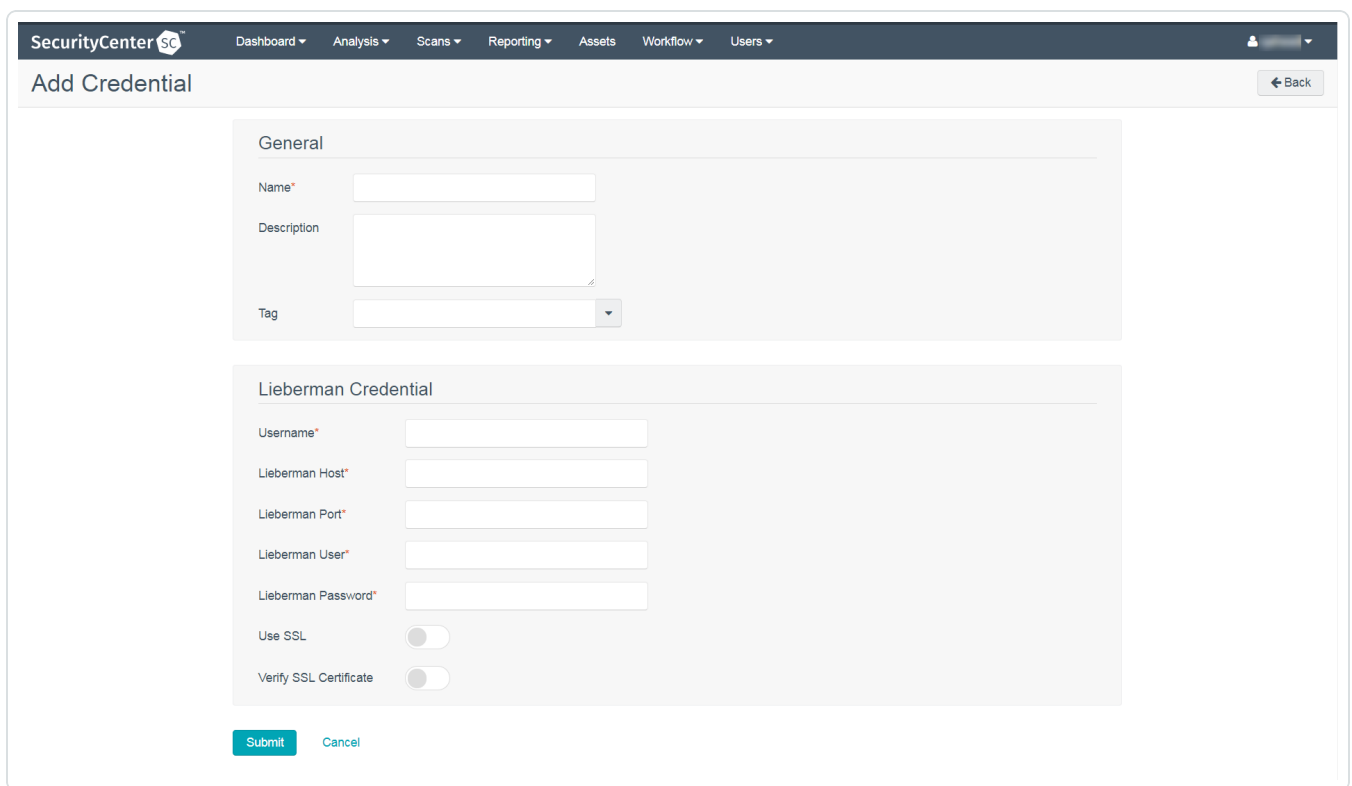



6. In the top section, enter a descriptive **Name** (required) , **Description** (optional), and **Tag** (optional).
7. Configure each field for **SSH** authentication. See the [Tenable.sc User Guide](#) to get detailed descriptions for each option.
8. Click **Save**.
9. Next, follow the steps for [adding the credential to a scan](#).



# Configure Database Integration

Tenable.sc provides full database support for Lieberman. Enable the plugins in the scanner to display them in the output.

To configure database integration:


1. Log in to Tenable.sc.
2. Click **Scanning > Credentials**.

The **Credentials** page appears.

3. Click **+Add** at the top of the screen.

The **Add Credential** page appears.

4. In the **Database** section, click **Oracle Database**.

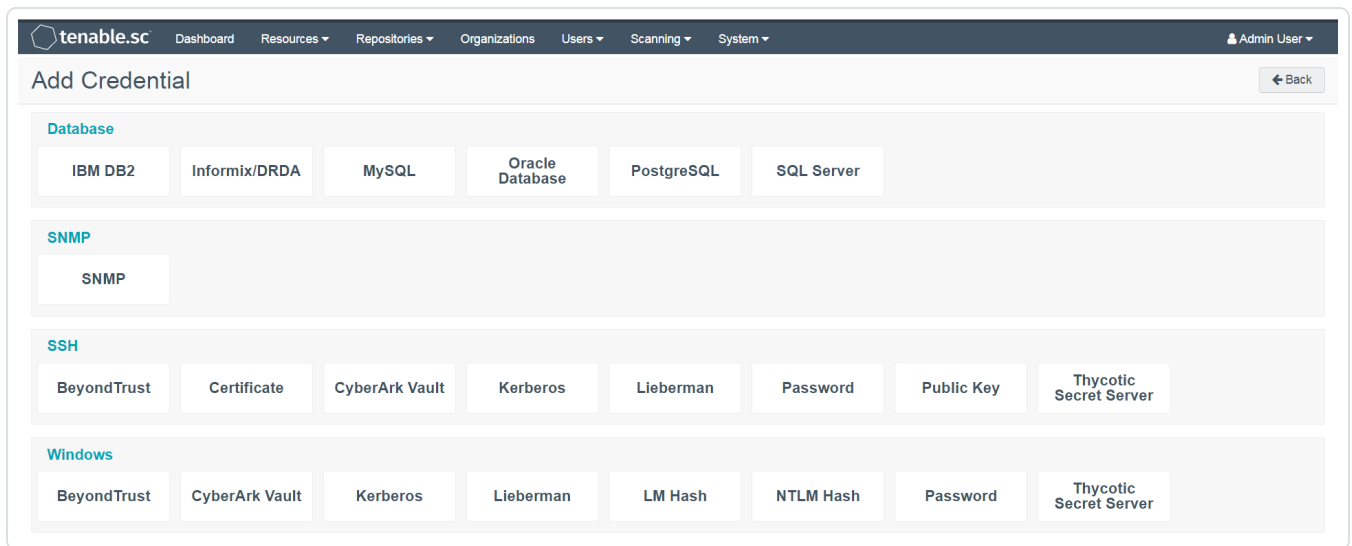

The **Add Credential** page appears.

5. In the **Name** field, type a descriptive name.
6. (Optional) In the **Descriptionn** field, type a description.
7. (Optional) In the **Tag** drop-down, select a tag.
8. In the **Authentication Method** drop-down, select **Lieberman**.



The **Lieberman** options appear.

tenable.sc Dashboard Resources Repositories Organizations Users Scanning System Admin User

### Add Credential

← Back

**General**

Name\* New\_Scan\_Lieberman

Description

Tag

**Oracle Database Credential**

Authentication Method Lieberman

Username\*

Port 1521

Authentication Normal

Service Type SID

Service

Lieberman Host\*

Lieberman Port\*

Lieberman User\*

Lieberman Password\*

Use SSL

Verify SSL Certificate

System Name

Submit Cancel

9. Configure each option for the **Oracle Database** authentication. See the [Database Credentials](#) section in the Tenable.sc User Guide to get detailed descriptions for each option.

10. Click **Submit**.

What to do next:

- Next, follow the steps to [Add a Credential to a Scan](#).



---

## Enable Database Plugins

---

To enable database plugins:

1. Complete the steps on the [Configure Options Plugin](#) page in the Tenable.sc User Guide.

See the chart for database plugin types and corresponding IDs.

Plugin Type	Plugin ID
MSSQL	91827
Oracle	91825
MySQL	91823
PostgresSQL	91826

2. Click **Save**.




# Add a Credential to a Scan

To add a Lieberman credential to a scan:

1. In the top navigation bar in Tenable.sc, click **Scans**.


A drop-down appears.

2. Select **Active Scans**.

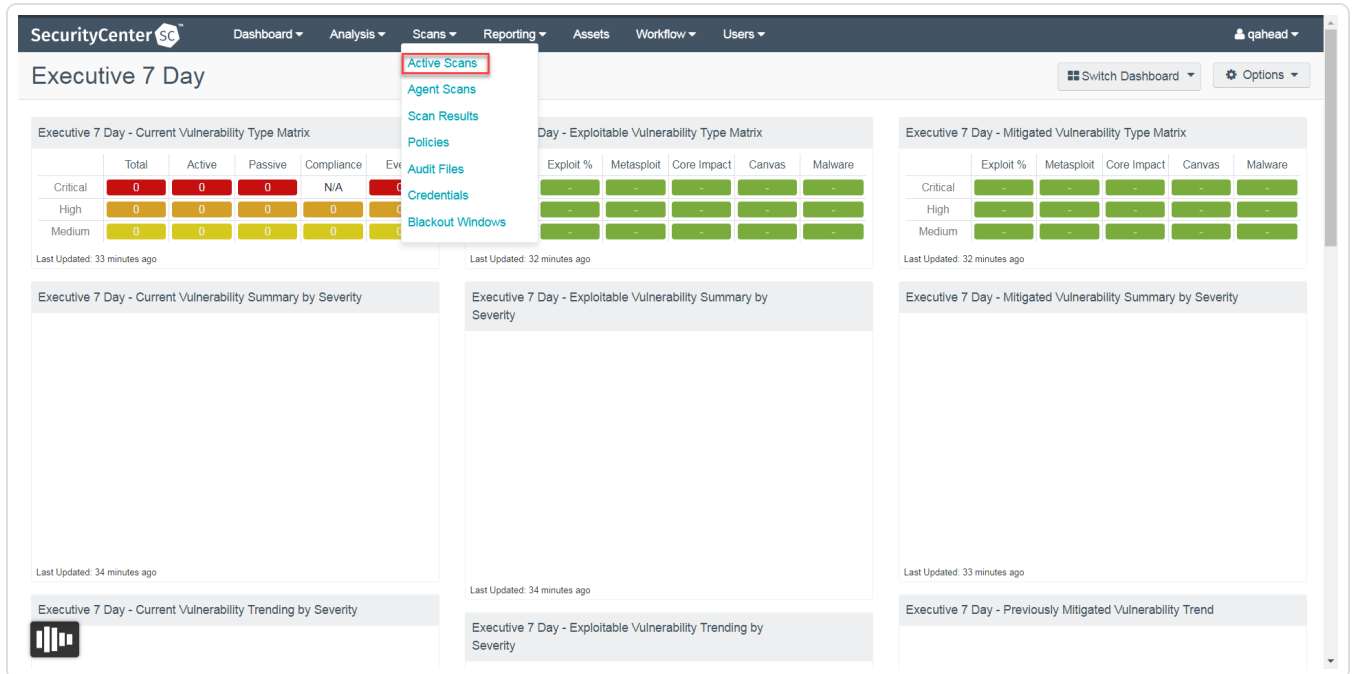

The **Active Scans** window appears.


3. In the top right corner, click **+Add**.

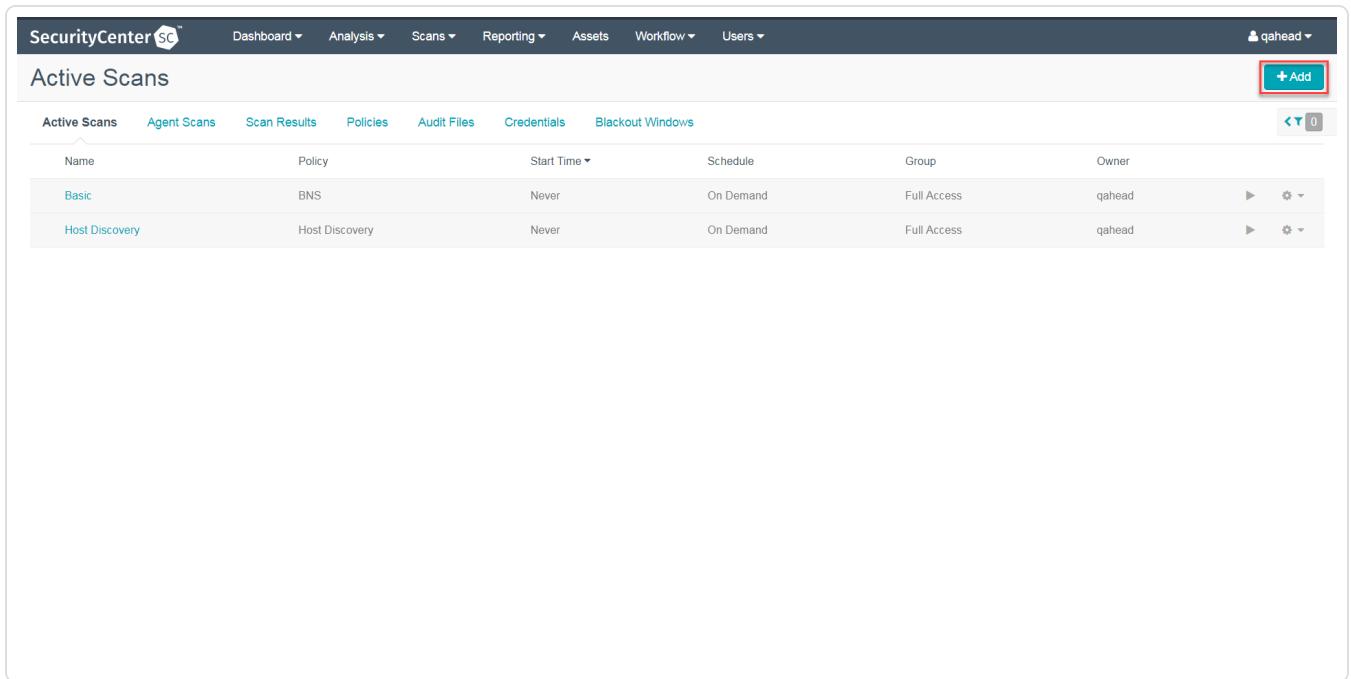


The **Add Active Scan** window appears.

4. In the left column, click **Credentials**.


The **Scan Credentials** section appears.

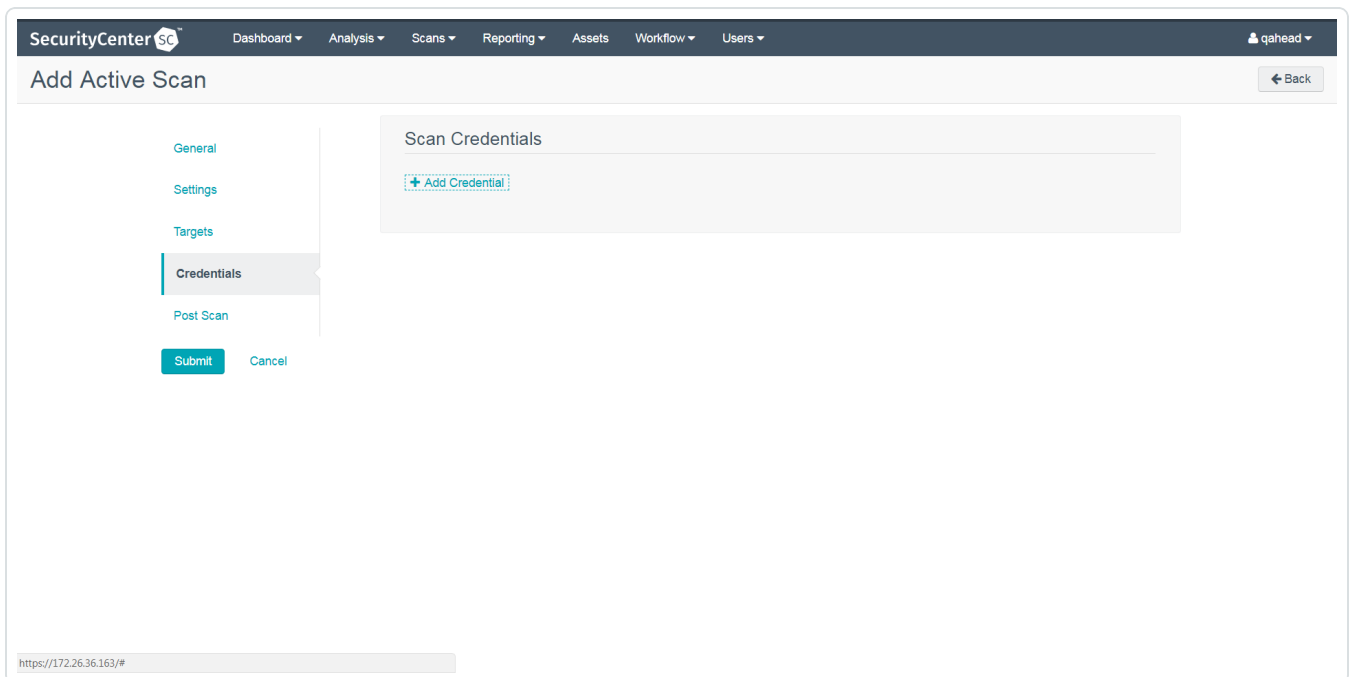

5. In the **Scan Credentials** section, click **+Add Credential**.

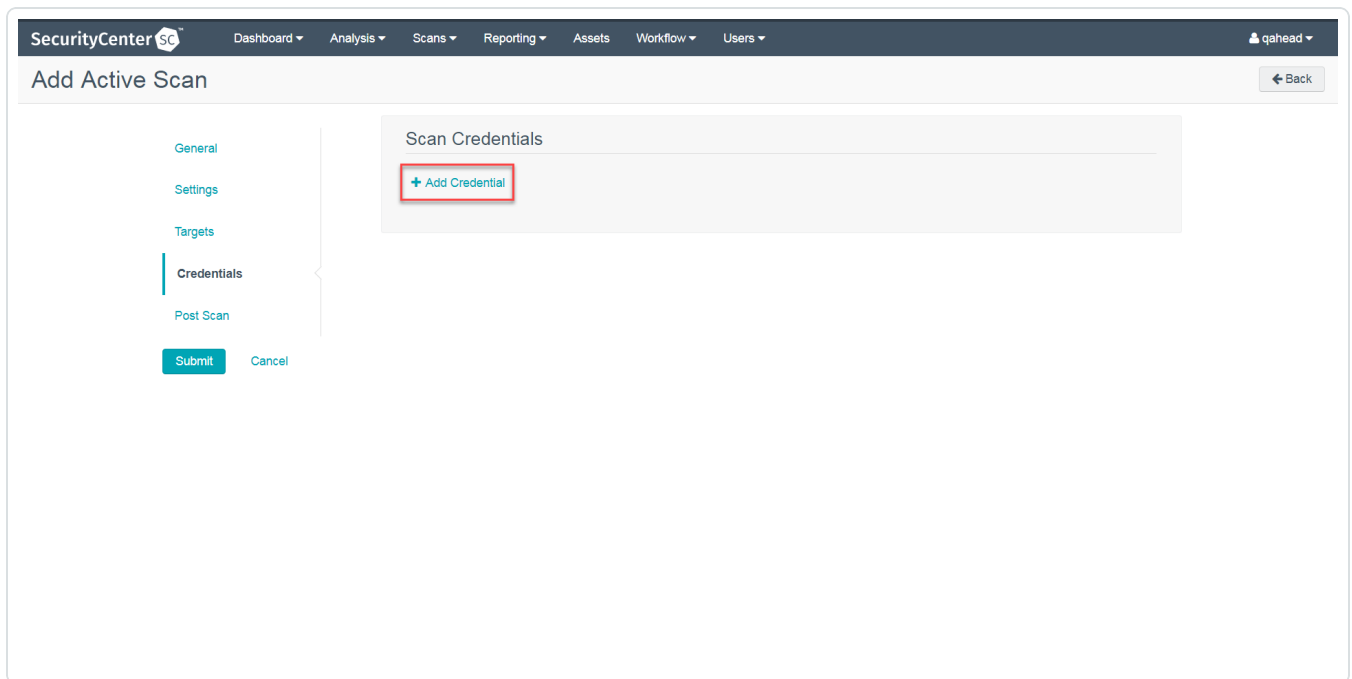

A drop-down appears.

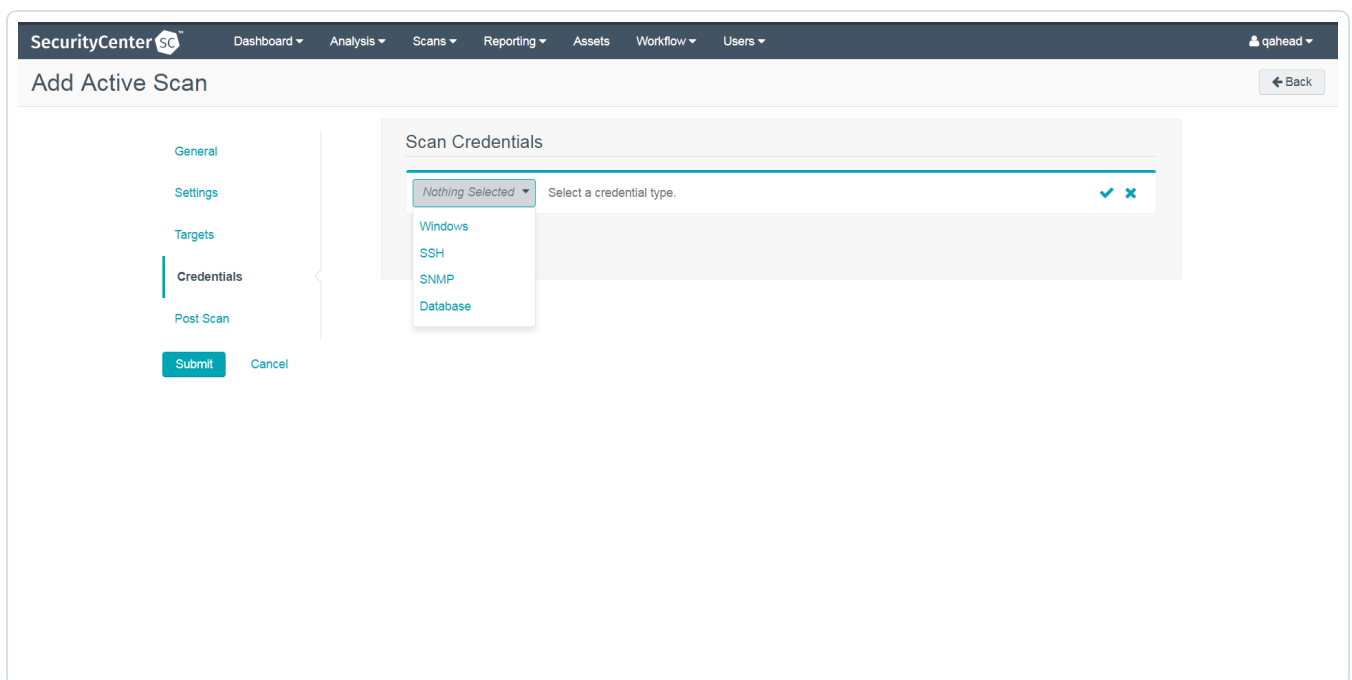


6. Select the system type.

The **Select Credential** option appears.





## 7. Click **Select Credential**.

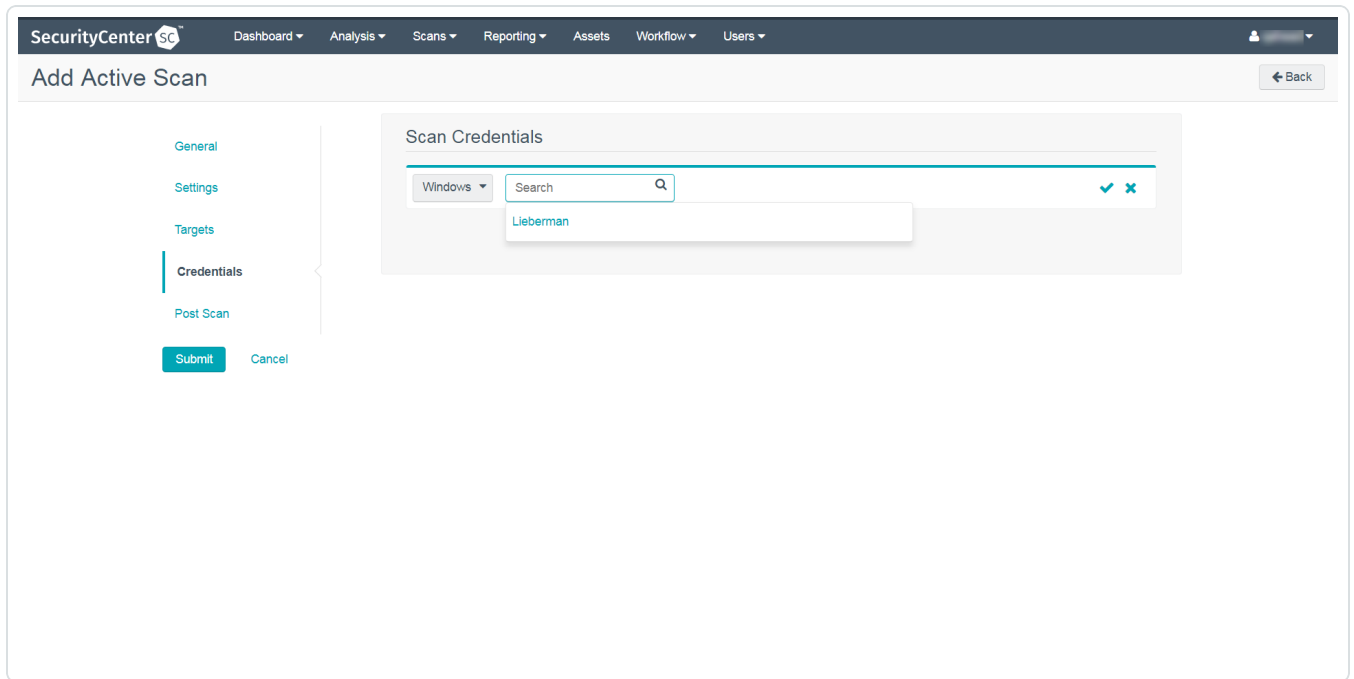

A drop-down appears.

8. Select the previously created credential.
9. Enter information for the **General**, **Settings**, **Targets**, and **Post Scan** sections.
10. Click **Submit**.



---

## Additional Information

---

[Lieberman System](#)

[About Tenable](#)



---

# Lieberman System

---

For additional information and documentation about the Lieberman system, go to <https://liebsoft.com/support/documentation/>.



---

## About Tenable

---

Tenable transforms security technology for the business needs of tomorrow through comprehensive solutions that provide continuous visibility and critical context, enabling decisive actions to protect your organization. Tenable eliminates blind spots, prioritizes threats, and reduces exposure and loss. With more than one million users and more than 20,000 enterprise customers worldwide, organizations trust Tenable for proven security innovation. Tenable's customers range from Fortune Global 500 companies, to the U.S. Department of Defense, to mid-sized and small businesses in all sectors, including finance, government, healthcare, higher education, retail, and energy. Transform security with Tenable, the creators of Nessus and leaders in continuous monitoring, by visiting [tenable.com](https://tenable.com).